PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶:

H04N 7/173, 7/087

A1

(11) International Publication Number: WO 97/18675

(43) International Publication Date: 22 May 1997 (22.05.97)

(21) International Application Number: PCT/US96/17920

(22) International Filing Date: 8 November 1996 (08.11.96)

(30) Priority Data:

60/006,585 13 November 1995 (13.11.95) US 60/024,965 30 August 1996 (30.08.96) US

(71) Applicant (for all designated States except US): E GUIDE, INC. [US/US]; c/o Schneider, Goldberg, Rohatiner & Yuen, 5th floor, 9100 Wilshire Boulevard, Beverly Hills, CA 90212 (US).

(72) Inventor; and


- (75) Inventor/Applicant (for US only): KWOH, Daniel, S. [US/US]; 3975 Hampstead Road, LaCanada/Flintridge, CA 91011 (US).
- (74) Agent: RAHN, LeRoy, T.; Christie, Parker & Hale, P.O. Box 7068, Pasadena, CA 91109-7068 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: SUBSCRIPTION TV WITH VBI PACKET DATA

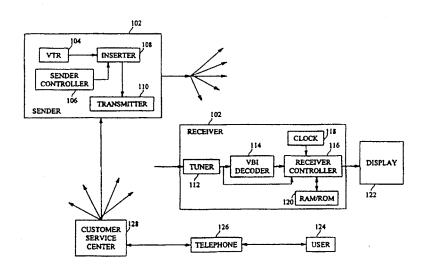

(57) Abstract

A system for sending selected up-to-date information in a television signal from a sender (100) located at a network head-end for television station to a receiver (102) co-located with a television viewer. The television viewer subscribes to an information service by telephoning a customer service center (128) affiliated with the sender. The customer service center informs the sender of the subscription and the sender sends data packets of information individually targeted for the television viewer in the vertical blanking interval of the television signal. The television viewer's receiver accepts (114, 116) the data packets identified for it and on viewer command displays information included therein on the television screen (122). The data packets include information relating to news, sports results, financial market updates, television programming guides, and the like. Information is displayed to the viewer in a menu format, allowing for ease of use in controlling presentation of various types of information.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mex.ico
ΑU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	น	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal .
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Торо
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Uktaine
ES	Spain	MG	Madagascar	UG	Ugunda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GΛ	Gabon	MR	Mauritania	VN	Vict Nam

SUBSCRIPTION TV WITH VBI PACKET DATA

This application claims the benefit of U.S. Provisional Application No. 60/006,585, filed November 10, 1995, and U.S. Provisional Application No. 60/024,965, filed August 30, 1996.

Field of the Invention

This invention relates generally to television systems and more specifically to a television system allowing a viewer to subscribe to a data service wherein packets of information are selectively sent in the television signal for display on the viewer's television at the viewer's command.

15

20

25

30

35

10

Background of the Invention

The general public has an ever increasing desire for obtaining up-to-date information relating to a variety of events and activities. For example, consumers like to be informed of current events such as international, national and local news, financial market news, sports results, and entertainment guides, in a real-time manner, without having to wait to see the next day's newspaper or the nightly evening news. Consumers also desire to control the timing of the receipt of the information so it can be available when the consumer wants to be informed. Furthermore, consumers want to receive only the information that interests them, without having to wade through other, unwanted information.

Recently, on-line computer services have provided such information to consumers in a controlled, selectable manner. However, the on-line services require the use of expensive specialized equipment such as personal computers, modems, and software, and require a certain level of sophistication and experience using the equipment. Many households do not have or cannot afford such equipment. Additionally, when a consumer is watching television and desires to receive selected up-to-date information, it is awkward and time-consuming for the consumer

to go to the consumer's personal computer, initialize it, log on to an on-line information service, and request the desired information (possibly paging through many other screens of information in order to locate the desired data).

A more useful information delivery system is needed that combines the real-time information distribution features of an on-line information service with the ease of use, low cost, and existing broadcasting infrastructure of a television system.

Summary of the Invention

5

10

15

20

25

30

35

It is an object of the present invention to provide a subscription information service to a plurality of television viewers.

It is another object of the present invention to send selected up-to-date information in a television signal to a television viewer.

It is a further object of the present invention to allow a television viewer to subscribe to one or more information services providing up-to-date information displayable on the viewer's television upon command by the viewer.

It a still further object of the present invention to send information to a selected television viewer who has subscribed to a particular information service in the television signal for display by the television on command by the viewer.

Additional objects, advantages and novel features of the invention will be set forth in part in the description which follows, and will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The objects and advantages of the invention may be realized and attained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

According to the present invention, the foregoing and other objects and advantages are attained by a system for sending data packets in the television signal to a selected television viewer. The data packets correspond to an information service that the

5

10

15

20

25

30

35

television viewer subscribes to by calling a customer service center for the information service. A sender at a network headend or television station receives subscriber information and inserts the data packets in the vertical blanking interval of the broadcast television signal with appropriate identifiers to enable the television viewer's receiver equipment (such as a television or a video cassette recorder) to accept and decode the data packets. The data packets containing up-to-date information are displayed on the television screen upon command by the viewer.

In an embodiment of the present invention, a subscription television system for providing selected current information from a subscription service provider to an individually addressable television viewer comprises a customer service center for subscribing by the individually addressable television viewer to at least one subscription information service provided by the subscription service provider; a sender located subscription service provider for sending a data packet including selected current information of the subscription information service subscribed to by the individually addressable television viewer, the sender including a sender controller for building the data packet uniquely identified for the individually addressable television viewer and for receiving subscription requests from the customer service center and for controlling insertion of the data packet into the television signal, and an inserter for inserting the data packet into the vertical blanking interval of a television signal, a transmitter for transmitting television signal, and a receiver co-located with individually addressable television viewer for receiving the television signal, the receiver including a receiver controller for accepting the data packet in the television signal when the data packet is identified for the individually addressable television viewer, for extracting the selected current information from the accepted data packet, and for controlling display of the extracted information when requested by the

individually addressable television viewer a memory for storing the extracted information, and a display for displaying the extracted information to the individually addressable television viewer.

Still other objects and advantages of the present invention will become readily apparent to those skilled in the art from the following detailed description, wherein is shown and described only the preferred embodiment of the invention, simply by way of illustration of the best mode contemplated for carrying out the invention. As will be realized, the invention is capable of other and different embodiments, and its several details are capable of modifications in various obvious respects, all without departing from the invention. Accordingly, the drawings and description are to be regarded as illustrative in nature, and not as restrictive.

Brief Description of the Drawings

5

10

15

25

30

35

FIG. 1 is functional block diagram of a data transmission system used in the present invention.

FIG. 2 is a block diagram illustrating the transmission of the data packets from the Sender to the Receiver.

FIG. 3 is an overview of some of the information contained in an example Services Selection Packet.

FIGs. 4a-4c are diagrams of the format of a Services Selection Packet.

FIG. 5 is a diagram of the format of the Promotion Packet.

FIG. 6 is a diagram of the format of an Activation Packet.

FIG. 7 is a diagram of the format of a Subscription Services Program Related Information (PRI) Packet.

FIG. 8 is an example of a display of a Services Selection Page.

FIG. 9 is an example of a display of a wait message.

FIG. 10 is an example of a display of a Promotion Message screen.

FIG. 11 is an example of a display of a confirmation message after the user has subscribed to a service.

FIG. 12 is an example of a display of a free trial message. FIG. 13 is an example of a display of a Sports Update Service showing levels of menus.

FIG. 14 is an example of a display of a second level menu page.

FIG. 15 is an example of a display of the Table Tennis third level menu page.

Detailed Description of the Preferred Embodiment

5

10

15

The present subscription television system uses a television broadcast system and video cassette recorder (VCR) as shown in U.S. Patent No. 5,488,409, incorporated herein by reference, and a Guide Plus+ device as shown in applications Serial No. 08/475,395, and Serial No. 08/364,708, also incorporated herein by reference.

20 In the preferred embodiment of the present system, a Host is a logical data broadcasting entity residing on a television broadcast signal. It appears in the form of a set of data packets that are sent through the Vertical Blanking Interval (VBI) lines in a National Television Standards Committee (NTSC) 25 signal. The television signal is received by a standard television tuner and the data packets are extracted from the VBI lines by circuitry in the receiver. The receiver may be a VCR, television, satellite receiver, or Guide Plus+ device. receiver then decodes the data packets and implements 30 functions contained therein. Four types of hosts are defined for carrying data over the VBI according to the Guide Plus+ system. The types of Hosts are Normal Show Information Packet (SIP) Host, Promotion Host, Service Host, and TV Guide+ Gold SIP Host. that the Host is a logical entity. As a result, a TV station can 35 carry more than one Host in the VBI lines of its broadcast signal.

5

10

15

20

25

30

35

FIG. 1 is functional block diagram of a data transmission system used in the present invention. As used herein, the terms "broadcast" and "transmit" are used interchangeably for the transmission of signals over cable or fiber optics, to or from satellites, over the air, and the like. A Sender (such as a network head end, station affiliate, or cable television company) 100 transmits a composite television signal containing inserted information in a portion thereof, typically the vertical blanking interval, to a plurality of Receivers 102. The Sender uses a Video Tape Recorder (VTR) 104 as a source of the information broadcast in the television signal. Sender Controller 106 provides data and commands to Inserter 108. The Inserter inserts data into the VBI of the composite television signal and provides the television signal to Transmitter 110, which in turn broadcasts the television signal.

Receivers obtain the television signal via antennas, satellite receivers, and cables (not shown). The Receiver 102 may be a VCR, television, or satellite device, or other receiving apparatus such as a Guide Plus+ device. Each Receiver 102 includes a Tuner 112 for tuning in a particular television signal being broadcast. The Tuner sends the television signal to the VBI Decoder 114. The VBI Decoder scans VBI lines 10-21 of fields 1 and 2 of the television signal and extracts any data resident in the signal. In addition, it is possible to use the first few visible lines in each video frame for VBI data, for example, lines 22-24. Lines 1 through 9 are typically used for vertical synchronization and equalization, and thus are not used to transmit data. Closed captioning and text mode data are generally transmitted on VBI line 21, field 1, of the standard NTSC video signal, at a rate of 2 bytes for each VBI line 21, The data in the VBI can be described in terms of the wave form, its coding and the data packet, all such details being well known in the art.

Data is sent at a data rate of 4 bytes/field/VBI line. If a Host commands both even and odd fields of a VBI line, then the

5

10

15

20

25

30

35

transmission data rate is 240 bytes/sec. The data is sent and stored as compressed data, with a compression efficiency of about 2:1 (i.e., 100 bytes of real data is compressed into about 50 bytes of compressed data). Transmission overhead is about 60-70% (i.e., to send 100 bytes of data, an extra 60-70 bytes of packet overhead is sent).

Receiver Controller 116 interfaces with Clock 118 and a Random Access Memory (RAM)/Read Only Memory (ROM) memory device 120 to control the display of the television signal from Tuner 112 and decoded data packets from VBI Decoder 114 on the Display 122. The Clock has an output that is a function of time. Receiver Controller preferably comprises programmable a microprocessor, microcontroller, or other similar control circuitry. It executes a program to manage reception of the data packets, interpretation of the fields of the data packets, and implementation of the commands included therein, including the enabling of display of a subscription television signal. RAM/ROM 120 stores pre-packaged display screens, data packets received in the VBI lines, and other control information. Display may be a television monitor, CRT display, computer monitor, and the like. The User 124 uses a standard Telephone 126 to communicate with Customer Service Center 128 to subscribe to a television subscription service or to terminate a television subscription service. The User 124 and the Receiver are colocated at the same site. The Customer Service Center may be a national or regional office providing subscription services to viewers. It may also include equipment for handling billing and accounting information relating to the subscription services The Customer Service Center 128 interacts with the Sender 100 to request the insertion of appropriate data packets to enable or disable a subscription service to the Receiver corresponding to the User. The Customer Service Center interacts with multiple Senders all over a geographic region or the entire country. The Receiver Controller then enables or disables display of the subscription service. The User 124 may also use

5

10

15

20

25

30

35

a remote controller with a standard infrared transmitter (not shown) coupled to an infrared receiver in the Receiver (not shown) to communicate with the Receiver Controller 116.

In the preferred embodiment, the total memory in the RAM/ROM 120 of a Receiver reserved for all data services (excluding TV Guide+ Gold) is 10 Kbytes. After decompression, this is equivalent to about 20 Kbytes of useable data. Each data service uses up to 10 Kbytes of memory. Each service announces its memory requirements in a Promotion Packet (described below). With this information, the Receiver knows whether it has enough memory for a new service. If it does not and the User tries to subscribe to it, an on-screen warning is displayed to the user. Independently, since all subscription activities are processed through the same Customer Service Center (which keeps track of all Machine IDs, services subscribed and memory available for each machine), it will be able to inform the User of his device's memory limitation. Within each data service, each sub-module accessible through a first level menu screen wil. also have a memory limit of 1K.

Each Receiver resident at a user's site receives free electronic television program guide information from one and only one Host. This Host is called the Normal SIP Host. A Normal SIP Host carries three different types of data packets, each of which will be described in further detail below. A Services Selection Packet is carried at SIP pre-load time. The minimum frequency of a Services Selection Packet is once per download of electronic program guide information. Activation Packets are carried at real-time and/or pre-load time as required. Other data packets are also carried when necessary.

The second type of Host is the Promotion Host. Receivers support a maximum of up to 24 services available for selection by a user, each service having its own Promotion Message carried with Promotion Packets. However, due to memory limitations, all of the Promotion Messages of the 24 services are not stored in advance in the RAM/ROM of the Receiver. Therefore, Promotion

5

10

15

20

25

30

35

Packets are periodically sent by Promotion Hosts to Receivers. Whenever a user wants to read the Promotion Message of a service, the Receiver 102 uses the Tuner 112 to tune to the Promotion Host for that service and then looks for a Promotion Packet. It will stay tuned to that channel until a time out occurs (the length of times for time outs for the different services are specified in the Services Selection Packet described below) or the corresponding Promotion Packet of the selected service has been received. Promotion Packets can be sent by one or more Promotion Hosts. For example, all Promotion Packets can be sent on the same Host or each can be sent on a different Host. The Promotion Host may also be responsible for transmitting the Activation Packet. When a user calls the Customer Service Center to start a service subscription, an Activation Packet will be sent either immediately or as part of the pre-load process.

The third type of host is a Service Host. The Service Host is responsible for transmitting Service Program Related Information (PRI) Packets. The service downloads occur either in real-time (in a Real-time Subscription Services PRI Packet) or in a pre-load fashion (in a Pre-load Subscription Services PRI Packet) at time slots specified by the Services Schedule in the Services Selection Packet.

The fourth type of host is a TV Guide+ Gold SIP Host, which supplies a subscription-based electronic television program guide. Operationally, it works like a Normal SIP Host, although the data is obtained from a different source. The TV Guide+ Gold SIP Host carries Services Selection Packets at SIP download time (minimum frequency is once per download), Activation Packets at real-time and at download time, TV Guide Gold+ SIP Packets at SIP download time (minimum frequency is once per download), and other data packets are required.

There are five types of data packets transferred in the television signal in the preferred embodiment of the present system. FIG. 2 is a block diagram illustrating the transmission of the data packets from the Sender to the Receiver. The packets

5

10

15

20

25

30

35

are decoded and implemented by the Receiver Controller 116 within the Receiver 102. These packet types include Services Selection Packets 130, Promotion Packets 132, Activation Packets 134, Subscription Services PRI Packets 136, and TV Guide+ Gold SIP Packets 138.

The Services Selection Packet 130 is a pre-load Type B Type A packets are data packets for initializing Receivers for parameters such as zip code, channel map selections, etc. Type B packets are data packets for selecting Receiver operational features. The Services Selection Packet is the root element of subscription services. Each Receiver shall receive one and only one Services Selection Packet and store it into its internal memory. This packet should be transmitted before any other kind of packet for subscription services. Upon receipt of a Subscription Services Packet, the list of available subscription services is shown on the Display 122 after the User presses a "FEATURE" button on the Guide Plus+ device. Until this packet is received, no "FEATURE" button is shown on the Receiver's on-screen display. An update of services selection is achieved by sending a Services Selection Packet with a The Services Selection different signature. Packet transmitted by a Normal SIP Host and by a TV Guide+ Gold Host at host download time. The packet is changed when services have changed, services memory requirements have changed, or a Promotion Message Location has changed.

FIG. 3 is an overview of some of the information contained in an example Services Selection Packet. The packet generally contains information on the number of selection services in the packet, the subscription identifier and promotion identifier of the subscription services, the channel number on which the subscription service information will be downloaded, the size of the subscription services, the name of the subscription services, and the host schedule of subscription services program-related information (PRI) and TV Guide+ Gold. Each packet includes a

5

10

15

20

25

30

35

unique Subscription ID, which denotes a general category of subscription services, such as sports, music, science, etc.

FIGs. 4a-4c are diagrams of the format of a Services Selection Packet. The Services Selection Packet 130 contains many fields for controlling the presentation of services to the User. As shown in FIG. 4a, the packet type number field 200 in byte 1, when set to six, denotes that this packet is used for managing subscription services. Byte 2 contains the total number of blocks in this packet 202. The total length of the packet 204 from byte 3 to the end of the packet, measured in units of bytes, is stored in bytes 3 (least significant byte) and 4 (most significant byte). Byte 5 is reserved 206. The subscription packet type 208 is in byte 6. When this field has a value of 4Dh, it indicates that the packet is a subscription Service Selection Packet. The signature field 210 in bytes 7-8 is a unique identifier for each subscription Service Selection Packet. It may not have a value of 0000h. A promotion message timeout value 212 is stored in byte 9. It specifies a time in minutes between 2 and 255 before a promotion message times out. Bytes 10-11 are reserved 214. The number of selection services 216 is defined for this packet in byte 12. There may be from zero to 24 services listed in a Services Selection packet. A value of zero indicates that there are no selections available for the User. The number of selection services indicates how many selection services information blocks are contained in the packet below this field.

Bytes 13-40 store information on the first subscription service to be displayed to the User. The promotion message ID 218 is stored in byte 13. Byte 14 holds the Subscription ID of the first service 220. If the packet is used as a TV Guide+ Gold packet, then this field contains the value 30h. The guide channel of the first subscription services 224 is the television channel number on which the first subscription service will be downloaded is located in byte 15. In the example of FIG. 3, the guide channel was channel 2. The size of the first subscription

5

10

15

20

25

30

35

services data is in byte 16. This field measures the size in terms of 256-byte blocks. Bytes 17-40 holds the name of the first subscription service. The name may be up to 24 characters long. If the name is less than 24 characters, the field is space-filled. Bytes 41-68 226 hold the second subscription service information. In a similar manner, the remainder of the subscription services are contained in bytes 69 to 684 228 as needed.

Continuing with FIG. 4b, byte number 685 holds the content length of the host schedules of the subscription services specified by this packet. This length is counted from byte 686 to the end of the host schedules. For example, if there are 8 schedules, then the value of the content length field would be 4+5*8=44 bytes, because each host schedule requires 5 bytes and there are four header fields in bytes 686-689. Bytes 686 and 687 are reserved. Pruning bytes for the schedules of subscription services 234 are located in bytes 688 and 689. 4-7 of byte 688 and bits 4-7 of byte 689 are set to 0100b. 0-3 of byte 688 are the pruning bits for schedules (-3), and bits 0-3 of byte 689 are the pruning bits for schedules 4-7. Pruning of schedules only starts after the first Subscription Services PRI packet is received. The memory for storage of the subscription services information is cleared before the schedule is downloaded if the pruning bit for the schedule is set. flags relating to the use of the guide channel number of the subscription service are located in bytes 690-691 236. 238 holds the higher order bits of the schedule start time, and byte 693 240 holds the remainder of the schedule start time and the number of hours of the duration of the schedule. The number of minutes of the duration of the schedule is stored in byte 694. The guide channel number, schedule start time and duration time fields are repeated in bytes 695-729 244 for the second through the eighth schedules.

Turning now to FIG. 4c, fields similar to those used for specifying the host schedules of subscription services are used

5

10

15

20

25

.30

35

for specifying the host schedules for TV Guide+ Gold services. Byte 775 246 stores the maximum compressed length of the first level detail text. The maximum number of characters is 48. The first level detail compressed text 248 is stored in bytes 776-824.

Referring back to FIG. 2, the Promotion Packet 132 is a real-time Type B packet that contains textual promotional information about a subscription service. It also indicates if the service is available on a "free trial" basis to the user. The Receiver accesses and receives it only when initiated by the User. The Promotion Packet contains a Promotion Services Identifier (PID), a Broadcast ID used by the Receiver to generate a seven digit Service ID to be displayed on the Display (the User uses this Broadcast ID to identify the service he/she wants to subscribe to when he/she calls the Customer Service Center), an indicator to show whether a "free trial" period is available for the service, and if available, how long the free subscription period is, and promotional text to introduce the service to the User. Promotion Packets are transmitted by a Promotion Host all day long, however, the maximum cycle time shall not be longer than the time supplied in the Services Selection Packet. Promotion Packets are changed when the content of the Promotion Message has changed. A User can view a promotion message as a result of pressing a VIEW button on the Guide Plus+ device. order to activate the display of the promotion message, there must be at least one promotion ID in the subscription Service Selection Packet that matches the Promotion Services ID.

FIG. 5 is a diagram of the format of the Promotion Packet. As shown in FIG. 5, the packet type number field 250 in byte 1, when set to six, denotes that this packet is used for managing subscription services. Byte 2 contains the total number of blocks in this packet 252. The total length of the packet from byte 3 to the end of the packet 254, measured in units of bytes, is stored in bytes 3 (least significant byte) and 4 (most significant byte). Byte 5 is reserved 256. The subscription

5

10

15

20

25

30

35

packet type 258 is in byte 6. When this field has a value of 50h, it indicates that the packet is a subscription Promotion Packet. A Promotion Services ID 260 is stored in byte 7. This identifier must match one of the promotion IDs in the Services Selection Packet. Bytes 8-11 are reserved 262. The next four fields define locations on the display where the User ID and the Service ID are shown. The row input position of the User ID 264 is located in byte 12. The upper left corner of the second level details area of the screen is considered to be origin (0,0) of a local display coordinate system. The range of values for the row input position of the User ID is zero to 6h. The column input position of the User ID 266 is located in byte 13. The range of values for the column input position of the User ID is zero to 16h. The row input position of the Service ID 268 is located in The range of values for the row input position of the Service ID is zero to 6h. The column input position of the Service ID 270 is located in byte 15. The range of values for the column input position of the Service ID is zero to 18h. Broadcast ID 272 is a packed binary coded decimal (BCD) representation of the displayed Service ID. Byte 16 holds the third and fourth digits of the Service ID, and byte 17 holds the fifth and sixth digits of the Service ID. Bytes 18 and 19 store the expiration time of the free trial. If this field is zero, then no free trial is available. The subscription ID 276 is found in byte 20. Bytes 21-27 are reserved 278.

Textual information for the Promotion message begins at byte 28. At this location, a first level detail length value 280 is found. The maximum number of bytes for a first level detail message is 48 compressed characters. Next, the first level detail promotion message 282 is stored in a variable number of bytes beginning with byte 29. If there is no data for a first level detail, then this field is zero-filled. Second level details begin where the first level details leave off in the packet. Each page of promotional information is accompanied by a length field as shown. The maximum number of bytes for a

5

10

15

20

25

30

35

second level detail message is 231 decompressed characters. Again, if there is no data for the message, then the fields are zero-filled.

Referring back to FIG. 2, the Activation Packet 134 is a pre-load or real-time Type B packet that performs three different It can start or extend a particular subscription functions. service to any single user or a group of users. It can shorten or even terminate the subscription of any single user or a group of users. It can also modify a user's User ID. An Activation Packet contains an action indicator to signify the type of action that is going to be taken, a User ID (or User ID range) to activate a Receiver, a new User ID to change a Receiver's User ID, and an expiration date to extend, shorten or terminate a subscription for a single or group of Receivers. The User ID is calculated by a random number generator. Activation Packets are transmitted by a Normal SIP Host, a TV Guide+ Gold Host, a Promotion Host, and a Services Host. Activation Packets can be transmitted at download time as a pre-load packet by the Normal SIP Host, TV Guide+ Gold Host, and Services Host, and by a Promotion Host as a real-time packet immediately after the user calls a Customer Service Center to activate a service. Activation Packets are changed when an activation/deactivation of a service occurs or when a Receiver device ID change is required.

FIG. 6 is a diagram of the format of an Activation Packet. The packet type number field 284 in byte 1, when set to six, denotes that this packet is used for managing subscription services. Byte 2 contains the total number of blocks in this packet 286. The total length of the packet from byte 3 to the end of the packet 288, measured in units of bytes, is stored in bytes 3 (least significant byte) and 4 (most significant byte). Byte 5 is reserved 290. The subscription packet type 292 is in byte 6. When this field has a value of 41h, it indicates that the packet is an Activation (and deactivation) Packet. The signature field 294 in bytes 7-8 is a unique identifier for each

5

10

15

20

25

30

35

subscription Service Selection Packet. It may not have a value of 0000h. Byte 9 296 holds a value indicating whether the packet is used for activating/deactivating an individual user or a group of users. When the field has a value of 30h, then individual activation/deactivation is selected. When the field has a value of 31h, then mass activation and deactivation is selected. individual activation/deactivation is selected, bytes 10-13 298 hold the old User ID in a packed BCD format. activation/deactivation is selected, the bytes 10-13 hold a starting range of User IDs to be activated or deactivated. When individual activation/deactivation is selected, bytes 14-17 300 hold the new User ID in a packed BCD format. activation/deactivation is selected, the bytes 14-17 hold an ending range of User IDs to be activated or deactivated. Subscription ID 302 of the subscription service to be activated or deactivated is found in byte 18 of the Activation Packet. expiration time 304 of a free trial period is specified in bytes 19 and 20. The value is in terms of days remaining in the trial period. For example, a value of 3Dh indicates 60 days (or two months) are left in the free trial period. If this is a deactivation packet, then this value is zero. The warning day field 306 is in byte 21 and the warning month field 308 is in byte 22. If the expiration date is less than the warning date, then an expiration warning screen is displayed to the User. telephone number 310 to dial to activate or deactivate a subscription service is stored in bytes 24-43 of the packet. If the telephone number is less than 20 bytes, then the remaining bytes are filled with the value 20h (i.e., ASCII blanks). Finally, bytes 44-64 312 are filled with the null character to enable scrambling.

Referring back to FIG. 2, the Subscription Services Program Related Information (PRI) Packet 136 is a pre-load or real-time Type B packet that contains PRI and service data. Subscription Services PRI Packets include encapsulated PRI data and a Subscription Service ID. A Receiver uses the Subscription

5

10

15

20

25

30

35

Service ID to determine whether the packet should be received and stored. The Subscription Services PRI Packet is transmitted by a Services Host as a pre-load packet at services download time as specified in a Services Selection Packet or at other times as a real-time packet. It is changed when new PRI is available. If a service is subscribed, its service PRI can be correctly received.

FIG. 7 is a diagram of the format of a Subscription Services Program Related Information (PRI) Packet. The packet type number field 314 in byte 1, when set to six, denotes that this packet is used for managing subscription services. Byte 2 contains the total number of blocks in this packet 316. The total length of the packet from byte 3 to the end of the packet 318, measured in units of bytes, is stored in bytes 3 (least significant byte) and 4 (most significant byte). This value is used to calculate the address of the next subscription. Byte 5 is the length of the compressed text title of the subscription service 320, counted from byte 6 to the end of the title. The subscription packet type 322 is in byte 6. When this field has a value of 53h, it indicates that the packet is a Subscription Services PRI Packet. The Subscription ID 324 is stored in byte 7, and byte 8 326 is The signature field 328 in bytes 9-10 is a unique identifier for each Subscription Services PRI Packet. compressed text title of the subscription service 330 starts in byte 11. It is limited to 20 uncompressed characters. level detail length field 332 follows the title. The first level detail is limited to 60 uncompressed characters. Next, the packet contains the first level detail compressed text. If no data is provided, this field is 00h. The second level detail length field 336 follows after the first level detail text. the second level detail length is less than 255 characters, then only one byte is used for the length field, otherwise two bytes are used. Finally, the second level detail compressed characters 338 follow the second level detail length field. If no data is provided, this field is 00h. In the preferred embodiment of the

5

10

present invention, the size of the buffer in the Receiver holding the compressed text is 510 bytes, and the size of the uncompressed buffer is 1022 bytes.

Referring back to FIG. 2, the TV Guide+ Gold SIP Packet 138 is a pre-load Type B packet that is similar to a normal Services Selection packet except that only Receivers subscribing to the TV Guide+ Gold service can receive it. The Packet contains Show Information Packet (SIP) data generated by TV GUIDE magazine and is transmitted by a TV Guide+ Gold Host at download time. It is changed every day. FIGs. 4a-4c discussed above also illustrate the fields of a TV Guide+ Gold SIP Packet.

For illustrative purposes, an example of using the television subscription system and method according to the 15 preferred embodiment is now described. After the user has completed the initial setup of a Receiver, the user receives electronic television program guide data and program related information (PRI) from a television programming source (Host). 20 When the electronic program guide data is downloaded in a television signal from the Normal SIP Host, a Services Selection Packet is sent at the same time and stored in the Receiver's RAM. As discussed above, the Services Selection Packet provides information to the Receiver concerning the available subscription 25 services. Subsequently, when the user displays the guide on the television screen, a green "FEATURE" button is shown on-screen as one of four soft color buttons. If the user presses a green button on the user's Guide Plus+ device, the Services Selection Page is shown on the television screen. FIG. 8 is an example of 30 a display of a Services Selection Page. The words "not subscribed" describe the status of the item currently highlighted by the cursor. In this example, "World News" has not yet been subscribed to by the user. The first line in the second level details area "HBO 15 (Last Channel)" describes the contents of the Picture-In-Picture (PIP) window (not shown in FIG. 8). 35

The user can choose a service by moving the cursor down to a selected item and then pressing a red "View" button on the

5

10

15

20

25

30

35

Guide Plus+ device. The Receiver automatically tunes to a Promotion Host for the selected service (note that the Promotion Host may actually be a different television broadcast station than the Normal SIP Host). For example, suppose the user wants to find out more information about the "Sports Update" service shown in FIG. 8. The user moves the cursor to highlight the Sports Update line and presses a red "View" button on the Guide Plus+ device. A wait message is then displayed on the screen during tuning of the selected service.

FIG. 9 is an example of a display of a wait message. In the example wait message, the "Sports Update" service is on the ESPN television network, which is received and displayed on the PIP window of the Display 122, with an appropriate description in the first line of the second level details area of the screen. After a short time, a real-time Promotion Packet containing the Promotion Message is received. The Promotion Message gives the user a brief description of the service and tells the user how to subscribe to the service. FIG. 10 is an example of a display of a Promotion Message screen. Note that it lists the service cost, a telephone number to call to subscribe to the service, a User ID and a Service ID.

The User 124 subscribes to a service by calling the Customer Service Center 128 at the telephone number listed on the television screen. The User is asked to enter the displayed User ID and Service ID via the telephone keypad. The User ID is a unique number making each Receiver individually addressable. The Service ID identifies the service to be activated. The User is also asked to enter the desired length of subscription in months or whether the User wants a month-by-month subscription (with an automatic renewal and charging unless the User calls the Customer Service Center to terminate the subscription). The User is then asked to provide credit card and address information for billing purposes.

Next, an Activation Packet is sent immediately on the same Promotion Host, in which case the service starts immediately.

5

10

15

20

25

30

35

Upon receiving the Activation Packet, the Receiver displays a confirmation message to the user. FIG. 11 is an example of a display of a confirmation message after the user has subscribed to a service. Note that pushing a blue "Surf" button on the User's Guide Plus+ device returns the User to the main guide screen.

For efficiency reasons, Activation Packets addressing many different Receivers can be sent overnight as part of the program guide data pre-load operation. In this case, there will be no immediate confirmation screen. The User is told over the telephone that the newly subscribed service will begin the next day and the User is instructed to return to the main guide screen by pressing the "Surf" button.

A User 124 can cancel or shorten the length of subscription for a service at any time by telephoning the Customer Service Center 128. The User is asked to provide the User ID, Service ID and other user identification information. Deactivation is effected by an Activation Packet, which can be sent immediately or one or many times as part of guide data pre-load operation in an off-peak time (such as the middle of the night).

A subscription service may want to offer free trials to users as an inducement for the users to subscribe to the service. Free trials may be offered in two ways. The first is as part of the normal subscription process. When the User calls the telephone number to subscribe to the selected service, the User may be informed that for a one year subscription, the first month is free and the User can cancel the service at any time. The User will be billed for 11 months, starting on the second month of service. In this way, a free trial is provided as part of the normal subscription process.

The second way to offer a free trial is as an instant free trial offer to all users. As part of the Promotion Packet, a flag may be set to enable an easier way of providing a free trial without the User having to call in to the Customer Service Center. Upon receiving the flag, the Receivers direct the

Display to show a green soft button with the word "Free", together with a Promotion Message. FIG. 12 is an example of a display of a free trial message.

A data service consists of a text file with one or more levels of menu pages to be displayed on the Display to allow random access to individual entry points in the file. FIG.13 is an example of a display of a Sports Update Service showing levels Note that "Olympics" is currently highlighted by the of menus. When the User presses the "Info" button on the Guide cursor. Plus+ device coupled to the Receiver, a second level menu page is displayed. FIG. 14 is an example of a display of a second level menu page. At this point, if the user presses the "1" key, a third level menu page is shown on the Display. This menu page would show the different events of "Track and Field." If the user presses the "6" key, a third level menu page might show, for example, the latest scores or stories relating to table tennis. FIG. 15 is an example of a display of the Table Tennis third level menu page. The User causes the second page of the story to be shown by pressing the down arrow cursor button.

The invention has been described in its presently contemplated best mode, and it is clear that it is susceptible to various modifications, modes of operation and embodiments, all within the ability and skill of those skilled in the art and without the exercise of further inventive activity. Accordingly, what is intended to be protected by Letters Patent is set forth in the appended claims.

30

5

10

15

20

25

35

WHAT IS CLAIMED IS:

10

15

20

25

30

35

1. A subscription television system for providing selected current information from a subscription service provider to an individually addressable television viewer comprising:

means (128) for subscribing by the individually addressable television viewer to at least one subscription information service provided by the subscription service provider;

means (100) located at the subscription service provider for sending a data packet including selected current information of the subscription information service subscribed to by the individually addressable television viewer, the sending means comprising

means (106) for building the data packet uniquely identified for the individually addressable television viewer;

means (108) for inserting the data packet into a vertical blanking interval of a television signal;

means (110) for transmitting the television signal; and means (106) for receiving subscription requests from the subscribing means and for controlling insertion of the data packet into the television signal;

means (102) co-located with the individually addressable television viewer for receiving the television signal, the receiving means comprising

means (114, 116) for accepting the data packet in the television signal when the data packet is identified for the individually addressable television viewer, and for extracting the selected current information from the accepted data packet;

means (120) for storing the extracted information; and means (116) for controlling display of the extracted information when requested by the individually addressable television viewer; and

means (122) for displaying the extracted information to the individually addressable television viewer.

5

- 2. The subscription television system of Claim 1, wherein the selected current information comprises international, national, or local news.
- 3. The subscription television system of Claim 1, wherein the selected current information comprises sporting event results.
- 4. The subscription television system of Claim 1, wherein the selected current information comprises television programming schedule information.
 - 5. The subscription television system of Claim 1, wherein the selected current information comprises financial market news.

20

- 6. The subscription television system of Claim 1, wherein the data packet is a first packet comprising a list of available subscription information services.
- 7. The subscription television system of Claim 1, wherein the data packet is a second packet comprising promotional information about a selected subscription information service.
- 8. The subscription television system of Claim 1, wherein the data packet is a third packet comprising information for starting or extending access for an individually addressable television viewer to a selected subscription information service.
- 9. The subscription television system of Claim 1, wherein the data packet is a fourth packet comprising television program related information for storage in the storing means.

10. The subscription television system of Claim 1, wherein the data packet is a fifth packet comprising television programming schedule information.

11. In a subscription television system, a method for providing selected current information from a subscription service provider to an individually addressable television viewer comprising the steps of:

subscribing by the individually addressable television viewer to at least one subscription information service provided by the subscription service provider;

building a data packet including selected current information of the subscription information service subscribed to by the individually addressable television viewer, the data packet being uniquely identified for the individually addressable television viewer;

inserting the data packet into a vertical blanking interval of a television signal;

transmitting the television signal by the subscription service provider;

receiving the television signal by the individually addressable television viewer;

accepting the data packet in the television signal when the data packet is identified for the individually addressable television viewer;

extracting the selected current information from the accepted data packet; and

displaying the extracted information to the individually addressable television viewer when requested by the individually addressable television viewer.


10


15

20

25

30

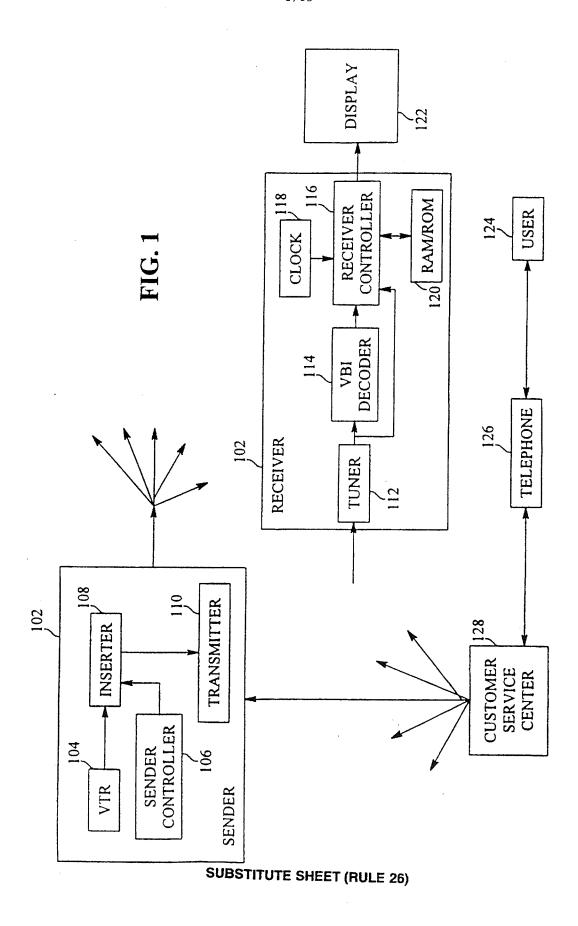

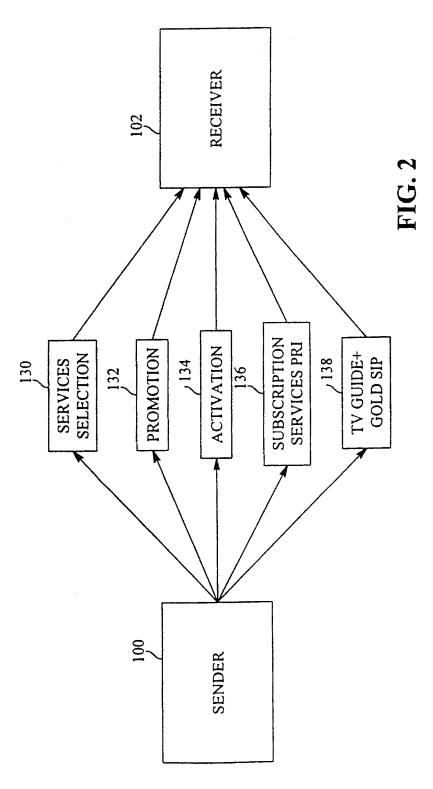

SUBSTITUTE SHEET (RULE 26)

TYPE = 4D	SERVICF=04h
TION PACKET	OF SELECTION
SUBSCRIPTION	NUMBER

NUMBER OF	SUBSCRIPTION PACKET TYPE=4D NUMBER OF SELECTION SERVICE=	IYPE=4D SERVICE=04h			F16.3		
NAME OF SUBSCRIPTIO (24 CHARAO	NAME OF SUBSCRIPTION SERVICES (24 CHARACTERS MAXIMUM)	PROMOTION MESSAGE ID	_	NO TION	SIZE OF THIS SUBSCRIPTION SERVICES	GUIDE CH THIS SER WILL BE	GUIDE CHANNEL OF THIS SERVICES THAT MILL BE DOWN! OADFD
SPORTS MUSIC		31h 32h	32h 27h	04h 08h	(1K BYTES) (2K BYTES)		2h 2h
SCIENCE PUBLICS		16h 18h	29h 20h	h 04h ((1K BYTES) (.5K BYTES)		2h 2h
HOST SCHE	HOST SCHEDULES OF SUBS	BSCRIPTION 3	SERVICE:				
HOST	GUIDE	START	DURATION	HOST	GUIDE	START	DURATION
SCHEDULE	CHANNEL	TIME	TIME	SCHEDULE	CHANNEL	TIME	TIME
· ·	2	8: 00	0: 30	വ	2	10:00	0:30
5	2	8: 30	0:30	9	2	10:30	0:30
~	2	9:00	0:30	7	2	11:00	0:30
4	2	9:30	0:30	∞	. 2	11:30	0:30
HOST SCHE	HOST SCHEDULES OF TV GL	GUIDE GOLD:					
HOST		START	DURATION	HOST	GUIDE	START	DURATION
SCHEDULE	CHANNEL	TIME	TIME	SCHEDULE	CHANNEL	TIME	TIME
· ·	2	12:00	0:30	Ŋ	2	14:00	0: 30
2	2	12:30	0: 30	9	2	14: 30	0:30
~)	5	13:00	0: 30	7	2	15:00	0:30
4	2	13: 30	0: 30	Φ	2	15:30	0: 30

FIG. 4α

1	PACKET TYPE NUMBER	~200
2	TOTAL NUMBER OF BLOCKS	10.202
	IN THIS PACKET	~202
3(LSB)	TOTAL LENGTH OF THIS PACKET	
4(MSB)	FROM BYTE 3 TO END OF THIS	~204
	PACKET	
5	RESERVED	~206
6	SUBSCRIPTION PACKET TYPE	~208
7-8	SIGNATURE OF THIS PACKET	~210
9	PROMOTION MESSAGE TIME-OUT	~212
10-11	RESERVED	~214
12	NUMBER OF SELECTION SERVICE	~216
13	PROMOTION MESSAGE ID	~218
14	SUBSCRIPTION ID OF FIRST	220
	SUBSCRIPTION SERVICES	~220
15	GUIDE CHANNEL OF FIRST	~224
	SUBSCRIPTION SERVICES	,
16	SIZE OF FIRST SUBSCRIPTION SERVICES	
17-40	NAME OF FIRST SUBSCRIPTION SERVICES	
41	PROMOTION MESSAGE ID	
42	SUBSCRIPTION ID OF SECOND	
	SUBSCRIPTION SERVICES	
43	GUIDE CHANNEL OF SECOND	> 226
	SUBSCRIPTION SERVICES	
44	SIZE OF SECOND SUBSCRIPTION SERVICES	
45-68	NAME OF SECOND SUBSCRIPTION SERVICES	
69-	REPEAT THE THIRD, FOURTH, ETC.	~228
MAX.684	SUBSCRIPTION SERVICES	~ ~220

FIG.4b

685	CONTENT LENGTH OF HOST	~230
	SCHEDULE OF SUBSCRIPTION SERVICE	
686	RESERVED	1
687	RESERVED	232
688-689	PRUNING BYTE OF SCHEDULE OF SUBSCRIPTION SERVICE(INCLUDING TV GUIDE GOLD SUBSCRIPTION PRI)	~234
690-691	GUIDE CHANNEL NUMBER OF SUBSCRIPTION SERVICE	~236
692	SCHEDULE START TIME HIGH	~238
693	SCHEDULE START TIME MINUTE AND DURATION HOUR	~240
694	DURATION MINUTE	~242
695-729	2ND. TO 8TH. SCHEDULES THIS PACKET MUST EXIST EVEN IF THIS SCHEDULE IS NOT VALID	~244

FIG.4c

730	CONTENT LENGTH OF HOST	7
	SCHEDULE OF TV GUIDE GOLD	
731	RESERVED	
732	RESERVED	
	PRUNING BYTE OF SCHEDULE OF TV GUIDE GOLD(ONLY SIPG)	
735-736	GUIDE CHANNEL NUMBER OF TV GUIDE GOLD	
737	SCHEDULE START TIME HIGH	
738	SCHEDULE START TIME MINUTE AND DURATION HOUR	
739	DURATION MINUTE	
740-774	2ND. TO 8TH. SCHEDULES THIS PACKET MUST EXIST EVEN IF THIS SCHEDULE IS NOT VALID	
775	1ST. LEVEL DETAIL LENGTH	~246
776–	1ST. LEVEL DETAIL (COMPRESSED TEXT)	~248

FIG.5

1	PACKET TYPE NUMBER	~250
2	TOTAL NUMBER OF BLOCKS IN THIS PACKET	~252
3(LSB) 4(MSB)	TOTAL LENGTH OF THIS PACKET FROM BYTE 3 TO END OF THIS PACKET	~254
5	RESERVED	~256
6	SUBSCRIPTION PACKET TYPE	~258
7	PROMOTION SERVICES ID	~260
8-11	RESERVED	~262
12 (DISABLE)	ROW INPUT POSITION OF USER ID	~264
13 (DISABLE)	COLUMN INPUT POSITION OF USER ID	~266
14 (DISABLE)	ROW INPUT POSITION OF SERVICE ID	~268
15	COLUMN POSITION OF SERVICE ID	7 ~~~
(DISABLE)	COLUMN POSITION OF SERVICE ID	~270
	BROADCAST ID	~272
(DISABLE)		~272 ~274
(DISABLE) 16,17	BROADCAST ID EXPIRE TIME OF FREE TRIAL SUBSCRIPTION ID	~272 ~274 ~276
(DISABLE) 16,17 18,19	BROADCAST ID EXPIRE TIME OF FREE TRIAL	~272 ~274
(DISABLE) 16,17 18,19 20 21-27	BROADCAST ID EXPIRE TIME OF FREE TRIAL SUBSCRIPTION ID RESERVED(7 BYTES) 1ST. LEVEL DETAIL LENGTH	~272 ~274 ~276
(DISABLE) 16,17 18,19 20	BROADCAST ID EXPIRE TIME OF FREE TRIAL SUBSCRIPTION ID RESERVED(7 BYTES) 1ST. LEVEL DETAIL LENGTH	~272 ~274 ~276 ~278
(DISABLE) 16,17 18,19 20 21-27 28	BROADCAST ID EXPIRE TIME OF FREE TRIAL SUBSCRIPTION ID RESERVED(7 BYTES)	~272 ~274 ~276 ~278 ~280
(DISABLE) 16,17 18,19 20 21–27 28 29–m	BROADCAST ID EXPIRE TIME OF FREE TRIAL SUBSCRIPTION ID RESERVED(7 BYTES) 1ST. LEVEL DETAIL LENGTH 1ST. LEVEL DETAIL (COMPRESSED) 2ND. LEVEL DETAIL LENGTH	~272 ~274 ~276 ~278 ~280
(DISABLE) 16,17 18,19 20 21–27 28 29–m m+l–n	BROADCAST ID EXPIRE TIME OF FREE TRIAL SUBSCRIPTION ID RESERVED(7 BYTES) 1ST. LEVEL DETAIL LENGTH 1ST. LEVEL DETAIL (COMPRESSED) 2ND. LEVEL DETAIL LENGTH (1 BYTE)	~272 ~274 ~276 ~278 ~280
(DISABLE) 16,17 18,19 20 21–27 28 29–m m+l–n n+l–p	BROADCAST ID EXPIRE TIME OF FREE TRIAL SUBSCRIPTION ID RESERVED(7 BYTES) 1ST. LEVEL DETAIL LENGTH 1ST. LEVEL DETAIL (COMPRESSED) 2ND. LEVEL DETAIL LENGTH (1 BYTE) 2ND. LEVEL DETAIL OF 1ST. PAGE 2ND. LEVEL DETAIL OF 1ST. PAGE	~272 ~274 ~276 ~278 ~280

SUBSTITUTE SHEET (RULE 26)

FIG. 6

1	PACKET TYPE NUI	MBER	~284
2	TOTAL NUMBER O	F BLOCKS	~286
= (\ o = \	IN THIS PACKET		_
3(LSB)	TOTAL LENGTH OF		200
4(MSB)	FROM BYTE 3 TO	END OF THIS	~288
5	PACKET RESERVED		
6	SUBSCRIPTION PA	CKET TYPE	~292
7 –8	SIGNATURE OF TH		~294
9	ACTIVATION AND	IMASS	
	DE-ACTIVATION	ACTIVATION AND	~296
	OF USER	DE-ACTIVATION	250
	30h	31h	
10-13	OLD USER ID	START RANGE OF	
	(4 BYTES)	USER ID TO BE	~298
		ACTIVATED AND	
14-17	NEW USER ID	DE-ACTIVATED	_
14-17		END RANGE OF USER ID TO BE	700
	(4 BYTES)	ACTIVATED AND	~300
		DE-ACTIVATED	
18	SUBSCRIPTION ID	OF SURSCRIPTION	
10	SERVICE THAT WIL		~302
	OR DEACTIVATED	ie de nominated	
19-20	EXPIRE TIME		~304
21	WARNING DAY		~306
(DISABLE)			
22	MONTH		
23	RESERVED		
24-43	TELEPHONE NUMB (20 BYTES)	ER PLAIN TEXT	
44-64	FILL WITH NULL C		~312
	ENABLE SCRAMBL	IIVG	

FIG. 7

1	PACKET TYPE NUMBER	~314
2	TOTAL NUMBER OF BLOCKS	~316
3(LSB)	IN THIS PACKET TOTAL LENGTH OF THIS PACKET	-
4(MSB)	FROM BYTE 3 TO END OF THIS	~318
	PACKET	
5	TITLE LENGTH OF COMPRESSED TEXT	-320 -322
6	SUBSCRIPTION PACKET TYPE SUBSCRIPTION ID	~ 324
7	RESERVED	~326
9(LSB) 10(MSB)	SIGNATURE	328
11-m	TITLE COMPRESSED TEXT	~330
m+1	1ST. LEVEL DETAIL LENGTH MAX. 60 UNCOMPRESSED TEXT	~332
m+2-n	1ST. LEVEL DETAIL COMPRESSED TEXT	~334
n+1	2ND. LEVEL DETAIL LENGTH (1 OR 2 BYTES) MAX. 510 COMPRESSED TEXT	~336
n+2-	2ND. LEVEL DETAIL COMPRESSED CHARACTERS	~338

FIG.8

SURF VIEW
LIST OF SERVICES AVAILABLE. CURSOR TO SELECT AND PRESS RED BUTTON FOR DETAILS. NOT SUBSCRIBED
HBO 15 (LAST CHANNEL)
TV GUIDE GOLD
world news////////////////////////////////////
NATIONAL NEWS
LOCAL NEWS
FINANCIAL MARKETS
SPORTS UPDATE
ENTERTAINMENT GUIDE

FIG.9

SURF
**
ESPN 27 TOUR DE FRANCE
PLEASE WAIT
CHANGING CHANNEL
TO RECEIVE DATA

FIG. 10

SURF

WELCOME TO THE SPORTS UPDATE SERVICE

ESPN 27 TOUR DE FRANCE

THE SPORTS UPDATE SERVICE BRINGS YOU THE LATEST SPORTS SCORES AND STORIES THROUGHOUT THE DAY, AT ONLY \$2/MO. TO SUBSCRIBE, CALL:

800-123-5678

USER ID: 903247230

SERVICE: 9931323

FIG. 11

SURF

WELCOME TO THE SPORTS UPDATE SERVICE

ESPN 27 TOUR DE FRANCE

CONGRATULATION!
YOU HAVE COMPLETED THE
SUBSCRIPTION PROCESS.
PRESS BLUE BUTTON TO EXIT.

FIG. 12

WELCOME TO THE ENTERTAINMENT GUIDE

KILA 5 5 0'CLOCK NEWS

FIND OUT INSTANTLY ABOUT ALL
ENTERTAINMENTS IN TOWN: MOVIES,
PERFORMING ARTS, SPORTS, EXHIBITS,
SPECIAL EVENTS, ETC. PRESS THE
GREEN BUTTON FOR A 1 MONTH FREE
TRIAL TO START TOMORROW
USER ID: 903247230
SERVICE: 9931323

FIG. 13

SURF	SERV
	OLYMPICS RESULTS OF OLYMPIC EVENTS TODAY
HBO 1	SHAWSHANK REDEMPTION
INFO CEI	TER
OLÝMPIĆ	
BASEBAL	-
TENNIS	
GOLF	
AUTO RA	CING
HORSE F	ACING
SOCCER	

FIG. 14

SURI	SERV	PRINT				
	OLYMPICS					
	PRESS DIGIT TO SELECT					
OLYMPICS						
1	TRACK/FIELD					
2	SWIMMING					
3	GYMNASTICS					
4	SOCCER					
5	VOLLEYBALL					
6	TABLE TENNIS					
7	ARCHERY					
		MORE ♥				

FIG. 15

SURF	SERV	PRINT		
	RESULTS OLYMPIC E TODAY	= :		
TABLE TENNIS SEMI-FINALS AT THE OLYMPICS (8/1, 15:20 EDT): '92 OLYMPICS CHAMPION, J. WALDNER OF SWEDEN, CONTINUED HIS MARCH TO DEFEND HIS TITLE BY BEATING KIM TAK SOO OF S. KOREA IN A 5 GAME CLIFF-HANGER: 23-21, 22-20, 20-22, 19-21, 25-23. HE WILL MEET CURRENT				
		MORE ♥		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US96/17920

A. CLASSIFICATION OF SUBJECT MATTER						
IPC(6) :H04N 7/173, 7/087 US CL :348/12, 461, 478						
According to International Patent Classification (IPC) or to both national classification and IPC						
	DS SEARCHED ocumentation searched (classification system followed	by classification symbols)				
U.S. : Please See Extra Sheet.						
Documentat	ion searched other than minimum documentation to the	extent that such documents are included	in the fields searched			
Electronic d	ata base consulted during the international search (nar	ne of data base and, where practicable,	search terms used)			
Please See Extra Sheet.						
C. DOC	UMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where app	propriate, of the relevant passages	Relevant to claim No.			
Y	US, A, 5,231,665 (AULD ET AL.) 2 col. 2, lines 34-56; col. 3, line 59 line 35 - col. 8, line 32	7 July 1993, figures 1-3; - col. 4, line 50; col. 5,	1-11			
Y	US, A, 5,357,276 (BANKER ET AL.) 18 October 1994, figures 1-2, 4; col. 3, line 65 - col. 4, line 18		1-11			
Υ	US, A, 4,890,321 (SETH-SMITH 1989, figures 1, 16-18; col. 6, line - col.	1-11				
A	US, A, 5,438,355 (PALMER) 01 August 1995, figures 1-2; 1-11 abstract					
Fund	her documents are listed in the continuation of Box C.	See patent family annex.				
1	pecial categories of cited documents:	*T* later document published after the inte date and not in conflict with the applic	ation but cited to understand the			
A document defining the general state of the art which is not considered to be of particular relevance *X* document of particular relevance; the claimed invention cannot be						
carlier document published on or after the international filing date		considered novel or cannot be considered when the document is taken alone	red to involve an inventive step			
I to the state of another colors of other		"Y" document of particular relevance; the considered to involve an inventive combined with one or more other such that the control of the con	step when the document is the documents, such combination			
"P" document published prior to the international filing date but later than "&" document member of the same patent family						
Date of the actual completion of the international search Date of mailing of the international search report						
09 JANUARY 1997 2 8 FEB 1997						
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Authorized officer CHRISTOPHER GRANT Oni When the Commissioner of Patents and Trademarks CHRISTOPHER GRANT Oni CHRISTOPHER GRANT						
Washington, D.C. 20231		Telephone No. (703) 305-4700				

INTERNATIONAL SEARCH REPORT

International application No. PCT/US96/17920

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

348/12, 13, 6, 7, 10, 461, 465, 468, 473, 478, 476, 477, 553, 563, 564, 906; 455/5.1, 4.2, 4.1, 6.1, 6.2, 6.3; HO4N 7/16, 7/173, 5/445, 7/08, 7/087

B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS, DIALOG

search terms: packet?, address?, vbi, vertical (2w)(blanking or interval),

user?, viewer?, subscrib?, id, identif?

catv. (cable or pay or subscrip? or subscrib?) (2w) (tv or television)